

**No title available**

**Publication number:** JP5263091

**Publication date:** 1993-10-12

**Inventor:**

**Applicant:**

**Classification:**

**- International:** **C10M169/00**; C10N10/02; C10N10/04; C10N30/00; C10N30/12; C10N40/02; C10N50/10; **C10M169/00**; (IPC1-7): C10M169/00; C10M105/04; C10M105/18; C10M115/08; C10M125/20; C10M125/22; C10M125/24; C10M135/10; C10M169/00; C10N10/02; C10N10/04; C10N30/00; C10N30/12; C10N40/02; C10N50/10

**- European:**


**Application number:** JP19920173093 19920630

**Priority number(s):** JP19920009329 19920122

**Report a data error here**

**Abstract of JP5263091**

**PURPOSE:** To obtain the subject bearing which does not suffer abnormal peeling due to hydrogen embrittlement on its rolling face even under conditions of a high rotational speed and a high load and is durable. **CONSTITUTION:** A rolling bearing 2 of an alternator is sealed with a grease composition prepared by adding 5-40wt.% thickener comprising an aromatic diurea compound containing two urea bonds (NHCONH) in the molecule or an aromatic urea/urethane compound containing both a urea bond and a urethane bond (NHCOO) in the molecule to a base oil prepared by mixing an alkyl diphenyl ether oil with a poly- $\alpha$ -olefin oil in a weight ratio of 20:80 to 80:20 and adding a passivating oxidizing agent such as sodium nitrite and an organic sulfonate such as barium sulfonate or zinc sulfonate.

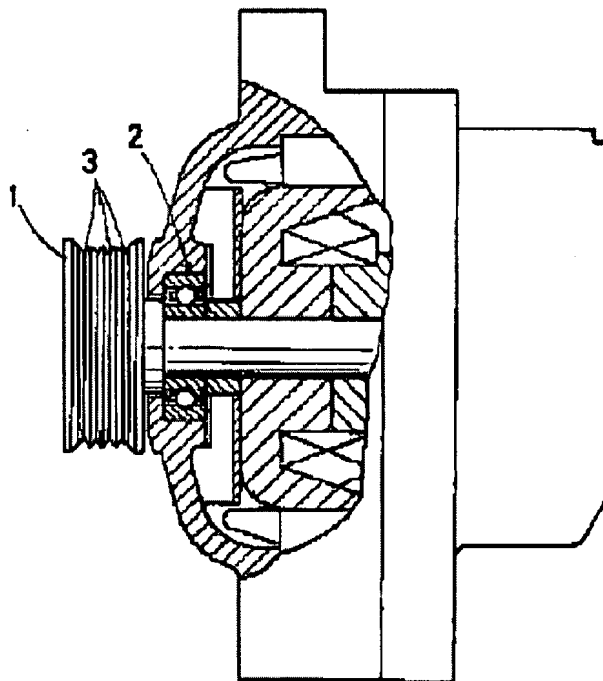

Data supplied from the esp@cenet database - Worldwide